


## ANTI - SLIP MATS

- ★ Ultra - high tear strength due to additional textile insert with a special coating.
- ★ Only 4.5 mm thick, thus highly flexible, dimensionally stable and trimmable.
- ★ Coefficient of sliding friction > 0.9; you can always count on a value of Q= 0,6 (statutory value).
- ★ Also suitable for heavy loads.
- ★ Easy to clean with standard cleaning agents. The closed surface means that liquids are not absorbed.
- ★ Very good resistance to acids, alkalis, petrol/gasoline, diesel and uncontaminated oils.
- ★ Already complies with the planned labeling requirements (district labeling).
- ★ Eco-friendly and easily disposable (no hazardous waste).
- ★ Temperature resistant from -40 °C to 120 °C.
- ★ Max. contact pressure 82.5 ton/m<sup>2</sup>.

Make - up	Thickness	Width	Length
	(mm)	(mm)	(mm)
Roll	8,00	250	5.000
Box of 120 pcs.	8,00	100	200
Box of 100 pcs.	10,0	100	200

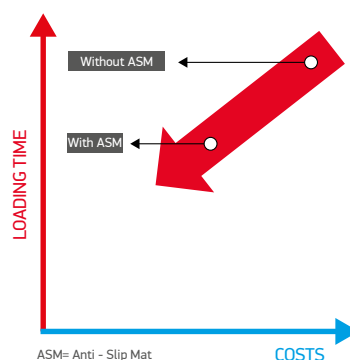

Make - up	Thickness	Width	Length
	(mm)	(mm)	(mm)
4 Rolls	4,50	120	4.000
4 Rolls	4,50	200	4.000
Roll	4,50	600	4.000
Roll	4,50	800	4.000
8 Edge pad - 100 pcs.	4,50	150	150
Roll	4,50	800	1.200