


## COMBINATION SLINGS


To be used for particularly harsh areas of application when looping around sharp-edged loads. The wearing zones are equipped here with high - tensile chains, which guarantee a particularly long service life of this combination slings.

### Choker Type chain - rope combination slings (DIN EN 818)

Consist of steel wire rope slings and chain with hook slings combination.



Nominal Diameter (mm)	Nominal Size of Chain (mm)	Vertical Lifting Working Load Limit (kg)	Choker Working Load Limit (kg)
10	6	1.000	800
14	8	2.000	1.600
16	10	2.700	2.150

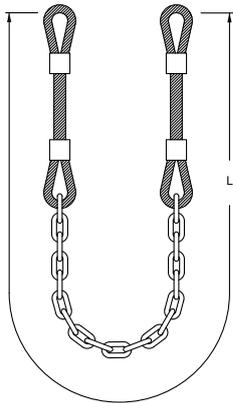

### Basket Type chain - rope combination slings (DIN EN 818)

Consist of steel wire rope slings and chain combination. Do not exceed maximum 60°. Can be produced in desired length (L).

Nominal Diameter (mm)	Nominal Size of Chain (mm)	Working Load Limit (0° - 45°) (kg)	Working Load Limit (0° - 45°) (kg)
10	6	1.400	1.000
14	8	2.800	2.000
16	10	3.800	2.700
22	13	7.000	5.000

