


## SYNTHETIC ROPES

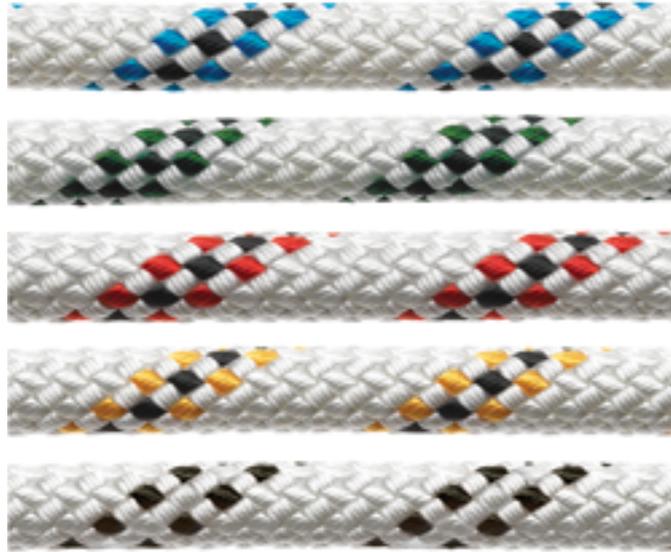

## FIBRE ROPE

- ★ The double - braided structure distributes the load evenly between the inner and outer braid.
- ★ High strength and long life.
- ★ Low elongation, high resistance to abrasion and weather conditions.
- ★ It is resistant to UV rays.
- ★ Easy to connect.

Diameter (mm)	Minimum Breaking Load (kg)	Weight (g/m)
3	180,0	8,00
4	270,0	13,0
5	440,0	20,0
6	667,0	29,0
8	1.160	51,0
10	1.780	80,0
12	2.540	115
14	3.420	156
16	4.420	204
18	5.550	258
20	6.800	319
22	8.160	386
24	9.680	450
25	10.000	480
26	11.300	539
28	13.000	625
30	14.900	717
32	16.800	816