


## LOAD DISTRIBUTOR - AGWP

Code	Connecting Link	Load Capacity	Load Capacity	a	e	d1	d2	h	h1	s	Weight
		0° - 45° (ton)	45° - 60° (ton)								
AGWP 7/8	CWP 10	4,25	3,00	210	51,0	22,0	25,0	15,5	14,0	15,0	1,75
AGWP 10	CWP 13	7,10	5,00	180	32,0	25,0	32,0	23,0	15,5	15,0	1,56


Please use the displayed item in column "Connecting Link" to assemble the load distributor in the four - leg sling. Static test coefficient = 2,5 x load capacity of the respective chain section; safety factor = 4

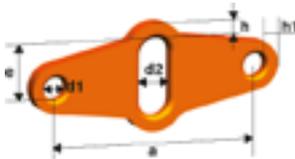

## LOAD DISTRIBUTOR - AGWW


Code	Connex	Load Capacity	Load Capacity	e	a	d1	d2	h	h1	s	Weight
		0° - 45° (ton)	45° - 60° (ton)								
AGWW 5/6	CW 8	2,00	1,40	35,0	148	16,0	22,0	11,0	9,00	10,0	0,54
AGWW 7/8	CW 10	3,55	2,50	51,0	210	22,0	25,0	15,5	14,0	15,0	1,75
AGWW 10	CW 13	5,60	4,00	32,0	180	25,0	32,0	23,0	15,5	15,0	1,56
AGWW 13	CW 16	9,50	6,70	53,0	240	32,0	40,0	27,0	20,0	20,0	3,60
AGWW 16	CW 19/20	14,0	10,0	77,0	300	40,0	50,0	32,0	25,0	25,0	7,00
AGWW 19/20	CW 32	20,0	14,0	79,0	390	50,0	70,0	45,0	30,0	30,0	13,2
AGWW 22	CW 32	26,5	19,0	124	350	60,0	70,0	50,0	35,0	30,0	14,7
AGWW 26	(**)	37,5	26,5	130	400	70,0	75,0	60,0	40,0	40,0	25,8

Please use this Connex to assemble the load distributor in the four - leg sling.  
(\*\*) GSCHW VB G-4163 WLL 55 t.

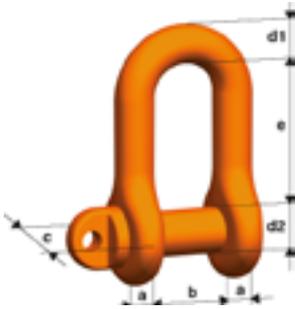


## SHACKLE - SCHW

Code	Load Capacity	e	b	a	d1	c	d2	Weight
	(ton)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg/pc.)
SCHW 5	1,00	24,0	11,0	7,00	8,00	16,0	8,00	0,11
SCHW 6	1,40	30,0	14,0	8,00	10,0	20,0	10,0	0,20
SCHW 7/8	2,50	36,0	17,0	10,0	12,0	24,0	12,0	0,41
SCHW 10	4,00	49,0	21,0	13,0	15,0	32,0	16,0	0,61
SCHW 13	6,70	61,0	27,0	17,0	19,0	40,0	20,0	1,42
SCHW 16	10,0	73,0	33,0	21,0	23,0	48,0	24,0	2,62
KHSW 22	19,0	214	62,0	52,0	27,0	62,0	196,0	9.05

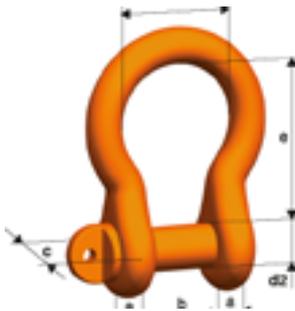


## CURVED SHACKLE - GSCHW

Code	Load Capacity	e	b	b1	a	c	d2	Weight
	(ton)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg/pc.)
GSCHW 7/8	2,50	51,0	22,0	32,0	13,0	34,0	16,0	0,46
GSCHW 10	4,00	64,0	27,0	43,0	16,0	40,0	19,0	0,85
GSCHW 13	6,70	76,0	31,0	51,0	19,0	46,0	22,0	1,27
GSCHW 16	10,0	95,0	43,0	68,0	25,0	59,0	28,0	2,90

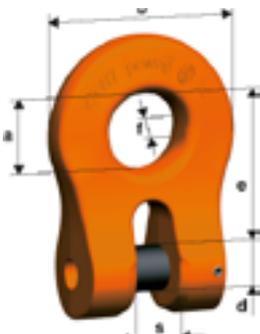


## COUPLING RING - KRW

Code	Load Capacity	e	s	a	b	f	d	Weight
	(ton)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg/pc.)
KRW 5/6	1,40	31,0	7,00	18,0	38,0	8,00	7,40	0,12
KRW 7	1,90	43,0	10,0	24,0	54,0	11,0	9,00	0,21
KRW 8	2,50	43,0	10,0	24,0	54,0	11,0	10,0	0,21
KRW 10	4,00	51,0	12,0	28,0	63,0	14,0	12,5	0,37
KRW 13	6,70	63,0	15,0	33,0	76,0	17,0	16,0	0,77
KRW 16	10,0	74,0	18,0	40,0	88,0	20,0	20,0	1,36
KRW 19/20	16,0	94,0	23,0	50,0	114	24,0	24,0	2,33
KRW 22	19,0	102	25,0	50,0	122	27,0	27,0	3,95

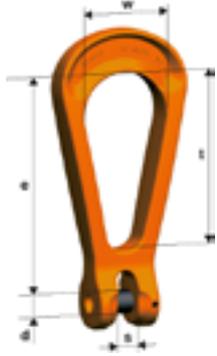

## CLEVIS REEVING LINK - KOW



Code	Load Capacity	e	t	w	d	s	Weight
	(ton)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg/pc.)
KOW 7	1,90	92,0	70,0	34,0	9,00	9,00	0,33
KOW 8	2,50	91,0	70,0	34,0	10,0	9,00	0,33
KOW 10	4,00	128	102	50,0	12,5	12,0	0,75
KOW 13	6,70	169	136	66,0	16,0	15,0	1,08
KOW 16	10,0	214	172	83,0	20,0	18,0	2,93

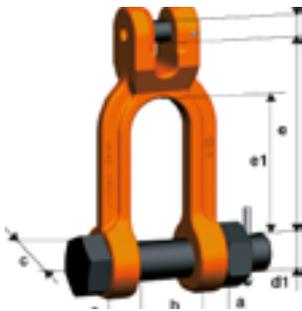

## CLEVIS SHACKLE - KSCHW

Code	Load Capacity	e	e1	b Min.	a	d	c	d1	Weight
	(ton)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg/pc.)
KSCHW 7	1,90	76,0	54,0	26,0	12,0	9,00	31,0	16,0	0,64
KSCHW 8	2,50	76,0	54,0	26,0	12,0	10,0	31,0	16,0	0,66
KSCHW 10	4,00	105	76,0	32,0	16,0	12,5	39,0	20,0	1,22
KSCHW 13	6,70	113	77,0	42,0	21,0	16,0	50,0	24,0	2,64



## PEWAG WINNER PROFILIFT GAMMA - PLGW

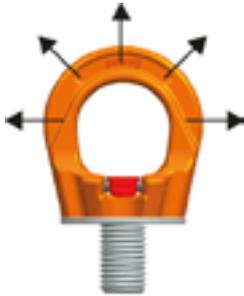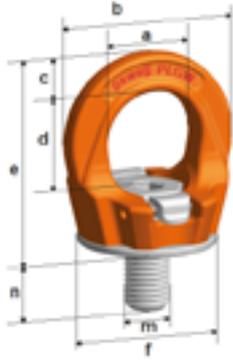

Code	Thread	Load Capacity	a	b	c	d	e	f	n	n Max.	Weight
	(mm)	(ton)	(mm)	(kg/pc.)							
PLGW 0,3 t	M8	0,30	25,0	45,0	10,0	27,0	53,0	35,0	15,0	90,0	0,20
PLGW 0,5 t	M10	0,50	25,0	45,0	10,0	27,0	53,0	35,0	15,0	160,0	0,21
PLGW 0,7 t	M12	0,70	30,0	55,0	12,0	32,0	63,0	43,0	20,0	160,0	0,32
PLGW 1,5 t	M16	1,50	35,0	64,0	14,0	36,0	70,0	50,0	25,0	160,0	0,48
PLGW 2 t	M20	2,00	40,0	73,0	16,0	41,0	81,0	54,0	30,0	160,0	0,90
PLGW 2,3 t	M20	2,30	40,0	73,0	16,0	41,0	81,0	54,0	30,0	160,0	0,58
PLGW 3,2 t	M24	3,20	50,0	86,0	18,0	50,0	93,0	69,0	35,0	1,0	1,10
PLGW 4,9 t	M30	4,90	60,0	110	25,0	60,0	114	90,0	45,0	-	2,20
PLGW 7 t	M36	7,00	70,0	132	31,0	70,0	136	108	55,0	-	3,80
PLGW 9 t	M42	9,00	80,0	152	36,0	72,0	153	126	65,0	-	5,70
PLGW 12 t	M48	12,0	95,0	179	42,0	88,0	179	148	75,0	-	8,70

Code	Thread	Load Capacity 1 Leg 0°	Load Capacity 1 Leg 90°	Load Capacity 2 Leg 0°	Load Capacity 2 Leg 90°	Load Capacity 2 Leg 0° - 45°
	(mm)	(ton)	(ton)	(ton)	(ton)	(ton)
PLGW 0,3 t	M8	1,00	0,30	2,0	0,60	0,42
PLGW 0,5 t	M10	1,50	0,50	3,0	1,00	0,70
PLGW 0,7 t	M12	2,00	0,70	4,0	1,40	0,98
PLGW 1,5 t	M16	4,00	1,50	8,0	3,00	2,10
PLGW 2 t	M20	4,50	2,00	9,0	4,00	2,80
PLGW 2,3 t	M20	5,00	2,30	10,0	4,60	3,20
PLGW 3,2 t	M24	6,50	3,20	13,0	6,40	4,50
PLGW 4,9 t	M30	12,0	4,90	24,0	9,80	6,90
PLGW 7 t	M36	15,0	7,00	30,0	14,0	9,80
PLGW 9 t	M42	22,0	9,00	44,0	18,0	12,6
PLGW 12 t	M48	30,0	12,0	60,0	24,0	16,9

Code	Thread	Load Capacity 2 Leg 45°-60°	Load Capacity 3/4 Leg 0° - 45°	Load Capacity 3/4 Leg 45° - 60°	Load Capacity 2 Leg Asymmetrical Load	Load Capacity 3/4 Leg Asymmetrical Load
	(mm)	(ton)	(ton)	(ton)	(ton)	(ton)
PLGW 0,3 t	M8	0,30	0,63	0,45	0,30	0,30
PLGW 0,5 t	M10	0,50	1,06	0,75	0,50	0,50
PLGW 0,7 t	M12	0,70	1,48	1,05	0,70	0,70
PLGW 1,5 t	M16	1,50	3,18	2,20	1,50	1,50
PLGW 2 t	M20	2,00	4,20	3,00	2,00	2,00
PLGW 2,3 t	M20	2,30	4,80	3,40	2,30	2,30
PLGW 3,2 t	M24	3,20	6,70	4,80	3,20	3,20
PLGW 4,9 t	M30	4,90	10,3	7,30	4,90	4,90
PLGW 7 t	M36	7,00	14,8	10,5	7,00	7,00
PLGW 9 t	M42	9,00	19,0	13,5	9,00	9,00
PLGW 12 t	M48	12,0	25,4	18,0	12,0	12,0

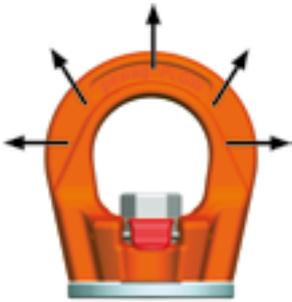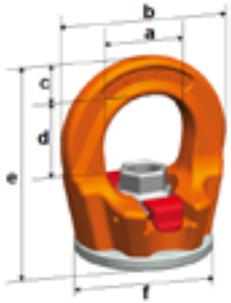



## WINNER PROFILIFT GAMMA EYE NUT - PLGW SN

Code	Thread	Load Capacity	a	b	c	d	e	f	Weight
	(mm)	(ton)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg/pc.)
PLGW-SN 0,3 t	M8	0,30	25,0	45,0	10,0	21,0	55,0	35,0	0,17
PLGW-SN 0,5 t	M10	0,50	25,0	45,0	10,0	21,0	55,0	35,0	0,17
PLGW-SN 0,7 t	M12	0,70	30,0	55,0	12,0	25,0	65,0	43,0	0,28
PLGW-SN 1,5 t	M16	1,50	35,0	64,0	14,0	29,0	72,0	50,0	0,42
PLGW-SN 2,3 t	M20	2,30	40,0	73,0	16,0	34,0	82,0	54,0	0,50
PLGW-SN 3,5 t	M24	3,50	50,0	86,0	18,0	40,0	95,0	69,0	1,00
PLGW-SN 4,9 t	M30	4,90	60,0	110	25,0	47,0	115	90,0	1,90

Code	Thread	Load Capacity 1 Leg 0°	Load Capacity 1 Leg 90°	Load Capacity 2 Leg 0°	Load Capacity 2 Leg 90°	Load Capacity 2 Leg 0° - 45°
	(mm)	(ton)	(ton)	(ton)	(ton)	(ton)
PLGW-SN 0,3 t	M8	1,00	0,30	2,00	0,60	0,40
PLGW-SN 0,5 t	M10	1,50	0,50	3,00	1,00	0,70
PLGW-SN 0,7 t	M12	2,00	0,70	4,00	1,40	1,00
PLGW-SN 1,5 t	M16	4,00	1,50	8,00	3,00	2,10
PLGW-SN 2,3 t	M20	5,00	2,30	10,0	4,60	3,20
PLGW-SN 3,5 t	M24	6,50	3,50	13,0	7,00	4,90
PLGW-SN 4,9 t	M30	12,0	4,90	24,0	9,00	6,90

Code	Thread	Load Capacity 2 Leg 45° - 60°	Load Capacity 3/4 Leg 0° - 45°	Load Capacity 3/4 Leg 45° - 60°	Load Capacity 2 Leg Asymmetrical Load	Load Capacity 3/4 Leg Asymmetrical Load
	(mm)	(ton)	(ton)	(ton)	(ton)	(ton)
PLGW-SN 0,3 t	M8	0,30	0,60	0,40	0,30	0,30
PLGW-SN 0,5 t	M10	0,50	1,00	0,70	0,50	0,50
PLGW-SN 0,7 t	M12	0,70	1,40	1,00	0,70	0,70
PLGW-SN 1,5 t	M16	1,50	3,00	2,20	1,50	1,50
PLGW-SN 2,3 t	M20	2,30	4,80	3,40	2,30	2,30
PLGW-SN 3,5 t	M24	3,50	7,40	5,20	3,50	3,50
PLGW-SN 4,9 t	M30	4,90	10,3	7,30	4,90	4,90

## WINNER PROFILIFT - PLAW ALPHA





Code	Thread	Load Capacity	a	b	c	d	e	g	h	k	n	n Max.	Weight
	(mm)	(ton)	(mm)	(kg/pc.)									
PLAW 0,63 t	M10	0,63	45,0	67,0	40,0	11,0	41,0	95,0	36,0	55,0	20,0	150	0,58
PLAW 1 t	M12	1,00	45,0	67,0	40,0	11,0	41,0	95,0	36,0	55,0	33,0	170	0,60
PLAW 1,5 t	M16	1,50	45,0	67,0	40,0	11,0	41,0	95,0	36,0	55,0	33,0	260	0,62
PLAW 2,5 t	M20	2,50	54,0	81,0	50,0	13,0	55,0	112	50,0	67,0	33,0	335	1,10
PLAW 4 t	M24	4,00	54,0	87,0	50,0	17,0	67,0	142	45,0	70,0	36,0	361	1,60
PLAW 6 t	M30	6,00	75,0	115	67,0	20,0	68,0	143	67,0	100	49,0	364	3,10
PLAW 7 t	M36	7,00	75,0	115	67,0	20,0	65,0	143	60,0	100	55,0	374	3,30
PLAW 8 t	M36	8,00	93,0	147	85,0	27,0	87,0	188	85,0	120	55,0	365	6,10
PLAW 10 t	M42	10,0	93,0	147	85,0	27,0	87,0	188	85,0	120	65,0	365	6,40
PLAW 15 t	M42	15,0	115	181	105	33,0	108	246	106	150	63,0	340	12,0
PLAW 20 t	M48	20,0	115	181	105	33,0	108	246	106	150	73,0	340	12,3

Code	Thread	Fastening Torque	Load Capacity 1 Leg 0°	Load Capacity 1 Leg 90°	Load Capacity 2 Leg 0°	Load Capacity 2 Leg 90°	Load Capacity 2 Leg 0° - 45°
	(mm)	(Nm)	(ton)	(ton)	(ton)	(ton)	(ton)
PLAW 0,63 t	M10	70,0	0,63	0,63	1,26	1,26	0,85
PLAW 1 t	M12	120	1,00	1,00	2,00	2,00	1,40
PLAW 1,5 t	M16	150	1,50	1,50	3,00	3,00	2,10
PLAW 2,5 t	M20	170	2,50	2,50	5,00	5,00	3,50
PLAW 4 t	M24	400	4,00	4,00	8,00	8,00	5,60
PLAW 6 t	M30	500	6,00	6,00	12,0	12,0	8,50
PLAW 7 t	M36	700	7,00	7,00	14,0	14,0	9,80
PLAW 8 t	M36	800	8,00	8,00	16,0	16,0	11,3
PLAW 10 t	M42	1.500	10,0	10,0	20,0	20,0	14,0
PLAW 15 t	M42	1.500	15,0	15,0	30,0	30,0	21,0
PLAW 20 t	M48	2.000	20,0	20,0	40,0	40,0	28,0

Code	Thread	Fastening Torque	Load Capacity 2 Leg 45° - 60°	Load Capacity 3/4 Leg 0° - 45°	Load Capacity 3/4 Leg 45° - 60°	Load Capacity 2 Leg Asymmetrical Load	Load Capacity 3/4 Leg Asymmetrical Load
	(mm)	(Nm)	(ton)	(ton)	(ton)	(ton)	(ton)
PLAW 0,63 t	M10	70,0	0,30	0,60	0,40	0,30	0,30
PLAW 1 t	M12	120	0,63	1,30	0,90	0,63	0,63
PLAW 1,5 t	M16	150	1,00	2,10	1,50	1,00	1,00
PLAW 2,5 t	M20	170	1,50	3,10	2,20	1,50	1,50
PLAW 4 t	M24	400	2,50	5,30	3,70	2,50	2,50
PLAW 6 t	M30	500	4,00	8,40	6,00	4,00	4,00
PLAW 7 t	M36	700	6,00	12,7	9,00	6,00	6,00
PLAW 8 t	M36	800	7,00	14,8	10,5	7,00	7,00
PLAW 10 t	M42	1.500	8,00	16,9	12,0	8,00	8,00
PLAW 15 t	M42	1.500	10,0	21,0	15,0	10,0	10,0
PLAW 20 t	M48	2.000	15,0	31,5	22,5	15,0	15,0



## WINNER PROFILIFT - PLBW BETA

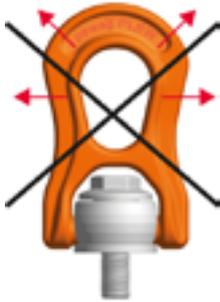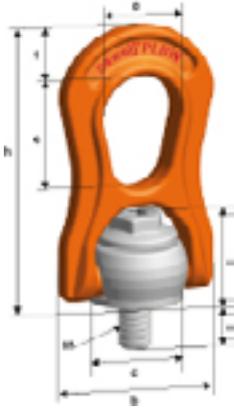

Code	Thread	Load Capacity	a	b	c	e	f	g	h	n	n Max.	Weight
	(mm)		(ton)	(mm)								
PLBW 1,6 t	M16	1,60	43,0	79,0	45,0	55,0	25,0	38,0	138	24,0	260,0	1,04
PLBW 2 t	M18	2,00	43,0	79,0	45,0	55,0	25,0	38,0	138	27,0	295,0	1,07
PLBW 2,5 t	M20	2,50	43,0	79,0	45,0	55,0	25,0	38,0	138	30,0	335,0	1,08
PLBW 3 t	M22	3,00	64,0	118	68,0	85,0	38,0	58,0	209	33,0	355,0	3,50
PLBW 4 t	M24	4,00	64,0	118	68,0	85,0	38,0	58,0	209	36,0	355,0	3,60
PLBW 5 t	M27	5,00	64,0	118	68,0	85,0	38,0	58,0	209	40,0	355,0	3,60
PLBW 6,3 t	M30	6,30	64,0	118	68,0	85,0	38,0	58,0	209	45,0	355,0	3,70
PLBW 8 t	M33	8,00	106	188	108	132	60	91	331	54,0	328,0	14,3
PLBW 10 t	M36	10,0	106	188	108	132	60	91	331	59,0	328,0	14,4
PLBW 12,5 t	M42	12,5	106	188	108	132	60	91	331	69,0	328,0	14,7
PLBW 15 t	M48	15,0	106	188	108	132	60	91	331	74,0	328,0	15,0

Code	Thread	Fastening Torque	Load Capacity 1 Leg 0°	Load Capacity 1 Leg 90°	Load Capacity 2 Leg 0°	Load Capacity 2 Leg 90°	Load Capacity 2 Leg 0° - 45°
	(mm)		(Nm)	(ton)	(ton)	(ton)	(ton)
PLBW 1,6 t	M16	50,0	2,50	1,60	5,00	3,20	2,20
PLBW 2 t	M18	70,0	3,00	2,00	6,00	4,00	2,80
PLBW 2,5 t	M20	100	3,50	2,50	7,00	5,00	3,50
PLBW 3 t	M22	120	4,50	3,00	9,00	6,00	4,20
PLBW 4 t	M24	160	5,50	4,00	11,0	8,00	5,60
PLBW 5 t	M27	200	6,50	5,00	13,0	10,0	7,00
PLBW 6,3 t	M30	250	7,00	6,30	14,0	12,6	8,80
PLBW 8 t	M33	270	9,00	8,00	18,0	16,0	11,0
PLBW 10 t	M36	320	11,0	10,0	22,0	20,0	14,0
PLBW 12,5 t	M42	400	13,5	12,5	27,0	25,0	17,5
PLBW 15 t	M48	600	16,0	15,0	32,0	30,0	21,0


Code	Thread	Fastening Torque	Load Capacity 2 Leg 45° - 60°	Load Capacity 3/4 Leg 0° - 45°	Load Capacity 3/4 Leg 45° - 60°	Load Capacity 2 Leg Asymmetrical Load	Load Capacity 3/4 Leg Asymmetrical Load
	(mm)		(Nm)	(ton)	(ton)	(ton)	(ton)
PLBW 1,6 t	M16	50,0	1,60	3,40	2,40	1,60	1,60
PLBW 2 t	M18	70,0	2,00	4,20	3,00	2,00	2,00
PLBW 2,5 t	M20	100	2,50	5,30	3,70	2,50	2,50
PLBW 3 t	M22	120	3,00	6,30	4,50	3,00	3,00
PLBW 4 t	M24	160	4,00	8,40	6,00	4,00	4,00
PLBW 5 t	M27	200	5,00	10,5	7,50	5,00	5,00
PLBW 6,3 t	M30	250	6,30	13,2	9,40	6,30	6,30
PLBW 8 t	M33	270	8,00	16,5	12,0	8,00	8,00
PLBW 10 t	M36	320	10,0	21,0	15,0	10,0	10,0
PLBW 12,5 t	M42	400	12,5	26,3	18,7	12,5	12,5
PLBW 15 t	M48	600	15,0	32,0	22,5	15,0	15,0

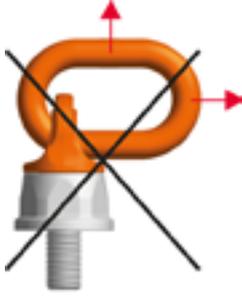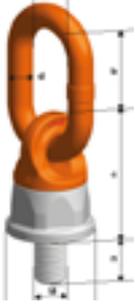

## WINNER PROFILIFT DELTA - PLDW

Code	Thread	Load Capacity	a	b	c	d	e	n	n Max.	Weight
	(mm)		(mm)							
PLDW 0,3 t	M8	0,30	30,0	38,0	54,0	13,0	38,0	20,0	100	0,45
PLDW 0,5 t	M10	0,30	30,0	38,0	54,0	13,0	38,0	20,0	180	0,45
PLDW 0,7 t	M12	0,70	35,0	48,0	54,0	13,0	38,0	22,0	200	0,48
PLDW 1 t	M14	1,00	35,0	48,0	54,0	13,0	38,0	22,0	200	0,49
PLDW 1,5 t	M16	1,50	35,0	48,0	54,0	13,0	38,0	33,0	250	0,51
PLDW 2,5 t	M20	2,50	35,0	55,0	75,0	16,0	55,0	33,0	250	1,10
PLDW 4 t	M24	4,00	40,0	66,0	82,0	17,0	63,0	40,0	300	1,50
PLDW 6,7 t	M30	6,70	50,0	70,0	92,0	23,0	72,0	40,0	300	2,60
PLDW 8 t	M36	8,00	50,0	91,0	120	23,0	92,0	55,0	300	4,30
PLDW 10 t	M42	10,0	65,0	91,0	120	27,0	92,0	60,0	300	5,10
PLDW 12 t	M45	12,0	65,0	91,0	120	27,0	92,0	68,0	-	5,20
PLDW 12,5 t	M48	12,5	65,0	116	120	27,0	92,0	68,0	300	5,40
PLDW 24 t	M56	24,0	70,0	105	154	33,0	110	84,0	300	10,2
PLDW 25 t	M64	25,0	70,0	105	154	33,0	110	96,0	300	11,0
PLDW 40 t	M72	40,0	90,0	130	213	45,0	170	110	500	29,0
PLDW 45 t	M80	45,0	90,0	130	213	45,0	170	120	500	30,0
PLDW M90 - 55 t	M90	55,0	90,0	130	213	45,0	170	135	500	32,0
PLDW M100 - 55 t	M100	55,0	90,0	130	213	45,0	170	150	500	35,0



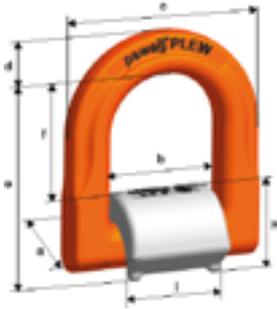


## WINNER PROFILIFT - PLEW ETA

Code	Load Capacity	a	b	c	d	e	f	h	l	Weight
	(ton)	(mm)	(kg/pc.)							
PLEW 1,5 t	1,50	32,0	38,0	65,0	14,0	65,0	40,0	25,0	35,0	0,32
PLEW 2,5 t	2,50	37,0	44,0	75,0	16,0	76,0	47,0	28,0	41,0	0,50
PLEW 4 t	4,00	43,0	48,0	84,0	18,0	83,0	51,0	32,0	45,0	0,75
PLEW 6,7 t	6,70	58,0	60,0	107	24,0	108	64,0	44,0	56,0	1,70
PLEW 10 t	10,0	69,0	66,0	126	27,0	123	69,0	54,0	61,0	2,80
PLEW 19 t	19,0	92,0	95,0	171	38,0	168	100	68,0	89,0	6,50

Code	Load Capacity 1 Leg 0°	Load Capacity 1 Leg 90°	Load Capacity 2 Leg 0°	Load Capacity 2 Leg 90°	Load Capacity 2 Leg 0° - 45°
	(ton)	(ton)	(ton)	(ton)	(ton)
PLEW 1,5 t	2,50	1,50	5,00	3,00	2,10
PLEW 2,5 t	4,00	2,50	8,00	5,00	3,50
PLEW 4 t	6,00	4,00	12,0	8,00	5,60
PLEW 6,7 t	10,0	6,70	20,0	13,4	9,40
PLEW 10 t	15,0	10,0	30,0	20,0	14,1
PLEW 19 t	25,0	19,0	50,0	38,0	26,8

Code	Load Capacity 2 Leg 45° - 60°	Load Capacity 3/4 Leg 0° - 45°	Load Capacity 3/4 Leg 45° - 60°	Load Capacity 2 Leg Asymmetrical Load	Load Capacity 3/4 Leg Asymmetrical Load
	(ton)	(ton)	(ton)	(ton)	(ton)
PLEW 1,5 t	1,50	3,10	2,20	1,50	1,50
PLEW 2,5 t	2,50	5,30	3,70	2,50	2,50
PLEW 4 t	4,00	8,40	6,00	4,00	4,00
PLEW 6,7 t	6,70	14,2	10,0	6,70	6,70
PLEW 10 t	10,0	21,2	15,0	10,0	10,0
PLEW 19 t	19,0	40,3	28,5	19,0	19,0




## OMEGA SHACKLE - TYPE VU

Code	Chain Diameter (mm)	Measurements						Working Load Limit (0° - 45°) (kg)	Weight (kg/pc.)
		e (mm)	b (mm)	d (mm)	s (mm)	a (mm)	M (mm)		
VU 06.8	6,00	34,0	21,0	9,00	11,0	16,0	7,00	1.120	0,07
VU 07.8	7,00	49,0	28,0	13,0	16,0	22,0	8,00	1.500	0,20
VU 08.8	8,00	48,0	28,0	13,0	16,0	22,0	10,0	2.000	0,22
VU 10.8	10,0	60,0	35,0	16,0	20,0	27,0	12,0	3.150	0,38
VU 13.8	13,0	72,0	39,0	18,0	24,0	34,0	16,0	5.300	0,67
VU 16.8	16,0	80,0	47,0	23,0	32,0	44,0	20,0	8.000	1,21
VU 20.8	20,0	96,0	56,0	26,0	36,0	52,0	24,0	12.500	1,97
VU 26.8	26,0	132	77,0	33,0	49,0	66,0	30,0	21.200	4,06



## UNILOCK CONNECTING LINK - U


Code	Load Capacity (ton)	e (mm)	b (mm)	d (mm)	s (mm)	a (mm)	M (mm)	Weight (kg/pc.)
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
U 5/6	1,12	34,0	21,0	9,00	11,0	16,0	7,00	0,09
U 7	1,50	49,0	28,0	13,0	16,0	22,0	8,00	0,22
U 8	2,00	48,0	28,0	13,0	16,0	22,0	10,0	0,23
U 10	3,15	60,0	35,0	16,0	20,0	27,0	12,0	0,39
U 13	5,30	72,0	39,0	18,0	24,0	34,0	16,0	0,65
U 16	8,00	80,0	47,0	23,0	32,0	44,0	20,0	1,34
U 19/20	12,5	96,0	56,0	26,0	36,0	52,0	24,0	2,03
U 26	21,2	121	77,0	36,0	49,0	74,0	30,0	4,70

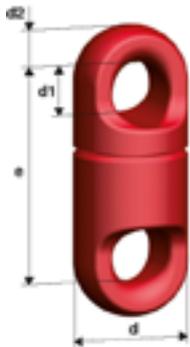

## SWIVEL - DF

Code	Load Capacity (ton)	e (mm)	d (mm)	d1 (mm)	d2 (mm)	Weight (kg/pc.)
		(mm)	(mm)	(mm)	(mm)	
DF 5/6 <sup>1)</sup>	1,12	44,0	22,0	12,0	7,00	0,10
DF 7/8 <sup>1)</sup>	2,00	60,0	27,0	16,0	8,00	0,20
DF 10 <sup>1)</sup>	3,15	74,0	32,0	20,0	10,0	0,30
DF 13 <sup>1)</sup>	5,30	92,0	40,0	25,0	13,0	0,60

<sup>1)</sup> Upon request!

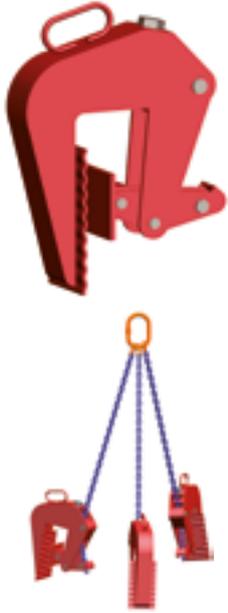

## CONCRETE PIPE LIFTING SLING

Code	Leg Length	Load Capacity Up to 30°	Up to Tube Diameter	Weight
	(mm)	(ton)	(mm)	(kg/pc.)
WIN 7 400 III AW-BRG1500	1.500	2,50	1.300	32,8
WIN 7 400 III AW-BRG1500 Unilock	1.500	2,50	1.300	33,5
WIN 7 400 III AW-BRG2000	2.000	2,50	1.800	34,7
WIN 7 400 III AW-BRG2000 Unilock	2.000	2,50	1.800	35,2
With Grab Hook				
WIN 7 400 III VXKW-BG 2000	2.000	2,50	1.800	38,9
WIN 7 400 III VXKW-BG 2500	2.500	2,50	2.300	39,5


Customs lengths are available upon request!



## CLEVIS TURNBUCKLE - KSS


Code	Load Capacity	Tension Distance	L Min.	L Max.	d1	Weight
	(ton)	(mm)	(mm)	(mm)	(mm)	(kg/pc.)
KSS 8	2,00	120	330	450	10,0	2,01
KSS 10	3,15	225	460	685	12,0	4,24
KSSW 16 *	10,0	250	530	780	20,0	10,0

\* KSSW 16: Grade 100

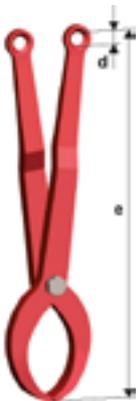

## HIGH TENSILE LIFTING TONG - HZ

Code	Load Capacity	Range	e	d	Required Chain Sling	Weight
	(ton)	(mm)	(mm)	(mm)		(kg/pc.)
HZ 0,125	0,125	100 - 200	310	15,0	WIN 5 II AW-CW 310	2,43
HZ 0,25	0,250	130 - 300	466	20,0	WIN 6 II AW-CW 410	4,77
HZ 0,5	0,500	160 - 400	629	28,0	WIN 7 II AW-CW 570	12,0
HZ 1	1.000	215 - 500	808	30,0	WIN 8 II AW-CW 730	24,0
HZ 2	2.000	250 - 600	959	30,0	WIN 8 II AW-CW 830	41,0

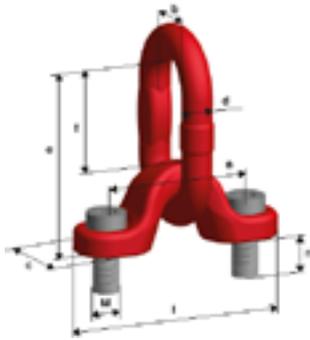


## LASHING POINT - AOR

Code	Thread	Load Capacity	Chain Diameter	a	b	c	d	e	f	l	n	Weight
	(mm)	(ton)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg/pc.)
AOR 10	M16	3,15	10,0	90,0	40,0	38,0	18,0	112	57,0	130	25,0	1,41
AOR 13	M20	5,30	13,0	115	50,0	48,0	22,0	149	79,0	165	36,0	2,83
AOR 16	M30	8,00	16,0	150	65,0	62,0	26,0	183	93,0	212	50,0	5,78
AOR 22	M36	15,0	22,0	175	75,0	72,0	36,0	226	114	255	54,0	10,9
AOR 26 <sup>1)</sup>	M42	21,2	26,0	200	95,0	90,0	45,0	272	142	295	67,0	19,3
AOR 28 <sup>1)</sup>	M45	25,0	28,0	200	95,0	90,0	45,0	272	142	295	67,0	20,2
AOR 32 <sup>1)</sup>	M56	31,5	32,0	230	110	100	48,0	336	193	330	88,0	31,7
AOR 34 <sup>1)</sup>	M56	36,0	34,0	230	110	100	48,0	336	193	330	88,0	31,7

<sup>1)</sup> Not stocked product.

Code	Thread	Fastening torque	Load Capacity 1 Leg 0°	Load Capacity 1 Leg 90°	Load Capacity 2 Leg 0°	Load Capacity 2 Leg 90°	Load Capacity 2 Leg 0° - 45°
	(mm)	(Nm)	(ton)	(ton)	(ton)	(ton)	(ton)
AOR 10	M16	170	3,15	3,15	6,30	6,30	4,25
AOR 13	M20	350	5,30	5,30	10,6	10,6	7,50
AOR 16	M30	950	8,00	8,00	16,0	16,0	11,2
AOR 22	M36	1.900	15,0	15,0	30,0	30,0	21,2
AOR 26 <sup>1)</sup>	M42	2.100	21,2	21,2	42,4	42,4	30,0
AOR 28 <sup>1)</sup>	M45	2.400	25,0	25,0	50,0	50,0	33,5
AOR 32 <sup>1)</sup>	M56	3.200	31,5	31,5	63,0	63,0	45,0
AOR 34 <sup>1)</sup>	M56	3.200	36,0	36,0	72,0	72,0	50,0

Code	Thread	Fastening torque	Load Capacity 2 Leg 45° - 60°	Load Capacity 3/4 Leg 0° - 45°	Load Capacity 3/4 Leg 45° - 60°	Load Capacity 2 Leg Asymmetrical Load	Load Capacity 3/4 Leg Asymmetrical Load
	(mm)	(Nm)	(ton)	(ton)	(ton)	(ton)	(ton)
AOR 10	M16	170	3,15	6,70	4,75	3,15	3,15
AOR 13	M20	350	5,30	11,2	8,00	5,30	5,30
AOR 16	M30	950	8,00	17,0	11,8	8,00	8,00
AOR 22	M36	1.900	15,0	31,5	22,4	15,0	15,0
AOR 26 <sup>1)</sup>	M42	2.100	21,2	45,0	31,5	21,2	21,2
AOR 28 <sup>1)</sup>	M45	2.400	25,0	50,0	37,5	25,0	25,0
AOR 32 <sup>1)</sup>	M56	3.200	31,5	67,0	47,5	31,5	31,5
AOR 34 <sup>1)</sup>	M56	3.200	36,0	75,0	53,0	36,0	36,0

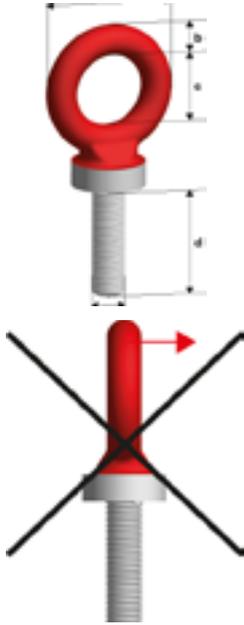


## ALLOY STEEL EYEBOLT - RGS


Code	Thread	Load Capacity 1 Leg 0°	Load Capacity 2 Leg 0°	a	b	c	d	e	Weight
	(mm)	(ton)	(ton)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg/pc.)
RGS 8	M8	0,40	0,80	34,0	7,00	20,0	24,0	44,0	0,05
RGS 10	M10	0,70	1,40	38,0	8,00	22,0	30,0	49,0	0,10
RGS 12	M12	1,00	2,00	47,0	10,0	26,0	36,0	59,0	0,14
RGS 14	M14	1,20	2,40	57,0	14,0	29,0	40,0	71,0	0,25
RGS 16	M16	1,50	3,00	65,0	14,0	35,0	55,0	79,0	0,36
RGS 18	M18	2,00	4,00	65,0	14,0	35,0	54,0	79,0	0,38
RGS 20	M20	2,50	5,00	73,0	16,0	39,0	59,0	89,0	0,55
RGS 22	M22	3,00	6,00	82,0	19,0	44,0	64,0	101	0,74
RGS 24	M24	4,00	8,00	95,0	20,0	54,0	84,0	114	1,12

Other sizes available on request.

Attention: Subject to technical changes.

### WARNING!

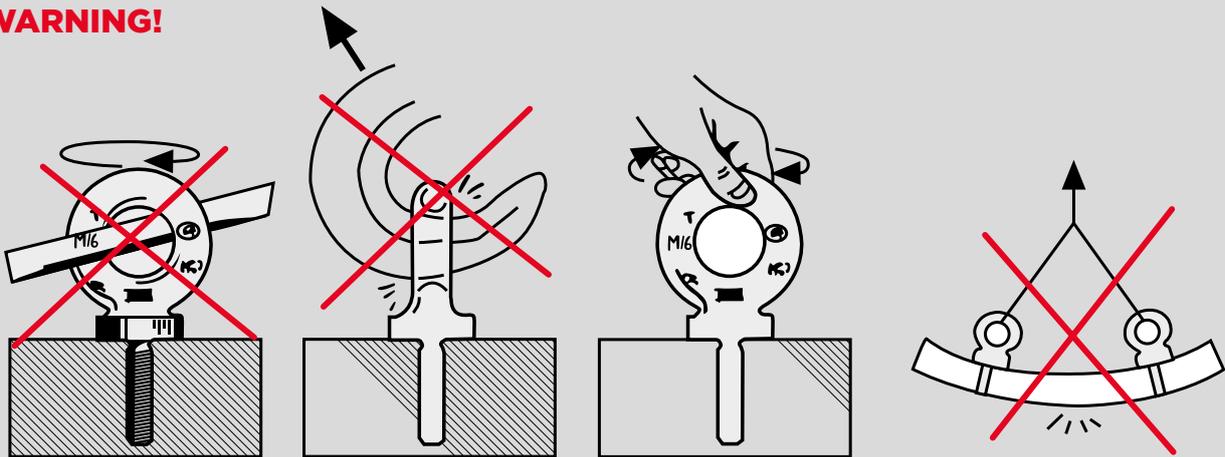

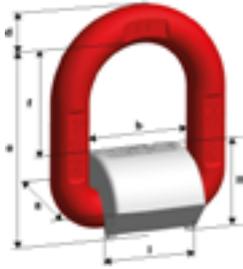

## PROFILIFT - PLE/N ETA

Code	Load Capacity	a	b	c	d	e	f	h	l	Weight
	(ton)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg/pc.)
PLE/N 6	1,12	36,0	40,0	62,0	11,0	67,0	42,0	26,0	35,0	0,31
PLE/N 8	2,00	37,0	42,0	69,0	13,0	73,0	45,0	28,0	37,0	0,40
PLE/N 10	3,15	41,0	45,0	78,0	16,50	80,0	47,0	34,0	40,0	0,63
PLE/N 13	5,30	61,0	55,0	99,0	22,0	97,0	53,0	44,0	50,0	1,46
PLE/N 16	8,00	63,0	70,0	120	25,0	120	73,0	48,0	64,0	2,30
PLE/N 22	15,0	89,0	97,0	163	33,0	163	92,0	70,0	90,0	5,40

Code	Load Capacity 1 Leg 0°	Load Capacity 1 Leg 90°	Load Capacity 2 Leg 0°	Load Capacity 2 Leg 90°	Weight
	(ton)	(ton)	(ton)	(ton)	(ton)
PLE/N 6	1,12	1,12	2,24	2,24	1,50
PLE/N 8	2,00	2,00	4,00	4,00	2,80
PLE/N 10	3,15	3,15	6,30	6,30	4,40
PLE/N 13	5,30	5,30	10,6	10,6	7,40
PLE/N 16	8,00	8,00	16,0	16,0	11,3
PLE/N 22	15,0	15,0	30,0	30,0	21,0

Code	Load Capacity 2 Leg 45°-60°	Load Capacity 3/4 Leg 0°-45°	Load Capacity 3/4 Leg 45°-60°	Load Capacity 2 Leg Asymmetrical Load	Load Capacity 3/4 Leg Asymmetrical Load
	(ton)	(ton)	(ton)	(ton)	(ton)
PLE/N 6	1,12	2,30	1,60	1,12	1,12
PLE/N 8	2,00	4,20	3,00	2,00	2,00
PLE/N 10	3,15	6,60	4,70	3,15	3,15
PLE/N 13	5,30	11,2	7,90	5,30	5,30
PLE/N 16	8,00	16,9	12,0	8,00	8,00
PLE/N 22	15,0	31,8	22,5	15,0	15,0