


14 - 26 mm
6xK19 Seale



28 - 36 mm
6xK26 Seale

OLIVEIRA SUPER YELLOW FIN - FC

- ★ Very flexible rope
- ★ Higher resistance against crushing
- ★ Higher resistance to fatigue
- ★ Higher breaking strength
- ★ Reduced wear when passing through blocks, guiding gear and purse seine rings
- ★ Lower tendency to untwist
- ★ Less elongation of wire rope


Applications:

Fishing wire rope for trawler.
Excellent performance on the trawler.



GENERAL VIEW

Diameter Range (mm)	Rope Construction	Steel Wire Rope Core	Number of Outer Strands	Number of Wires in Outer Strands	Rope Grade (N/mm ²)	Average Spin Factor
14 - 26	6xK19 S	FC	6	114	1570	-
28 - 36	6xK26 WS	FC	6	156	1570	-

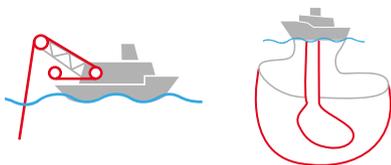



OLIVEIRA SUPER YELLOW - FC

Rope Diameter	Minimum Breaking Force 1570 N/mm ²	Weight
(mm)	(ton)	(kg/m)
14	11,82	0,77
16	15,90	1,01
18	20,18	1,29
19	22,12	1,43
20	23,96	1,55
21	26,87	1,72
22	29,87	1,90
24	35,47	2,26
25	38,63	2,47
26	42,30	2,70
28	47,30	3,05
30	51,48	3,34
30	51,48	3,34
32	61,16	3,95
34	69,62	4,51
36	77,47	5,04