


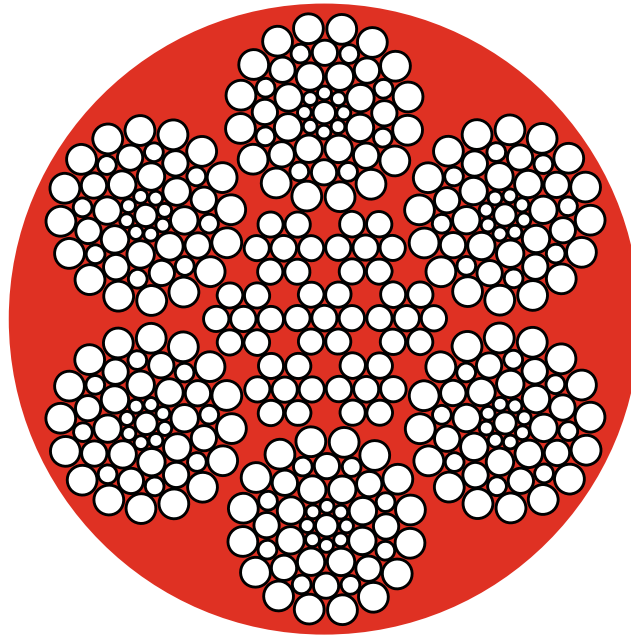


GENERAL VIEW

Production Range: From 44,5 mm (1^{3/4} inch) to 127 mm (5 inch)

UNION 6-STRAND PFV

- ★ PFV cushions the strands, distributes internal stresses, keeps in wire rope lubricant and keeps out dirt and debris.
- ★ 6 Strand construction.
- ★ Proprietary wire metallurgy for exceptional wear resistance.

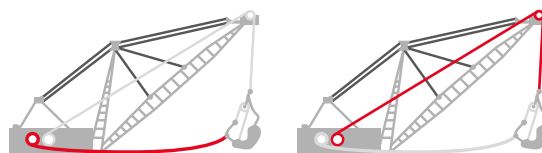



UNION 6 - STRAND PFV

Rope Diameter		Minimum Breaking Force		Approximate Weight	
(mm)	(inch)	(kN)	(ton)	(kg/m)	(lb/ft)
44.5	1 3/4	1.361	153,00	8,40	5,67
47.6	1 7/8	1.548	174,00	9,70	6,50
50.8	2	1.762	198,00	11,00	7,39
54	2 1/8	1.966	221,00	12,40	8,35
57.2	2 1/4	2.198	247,00	13,90	9,36
60.3	2 3/8	2.438	274,00	15,50	10,40
63.5	2 1/2	2.687	302,00	17,30	11,60
66.7	2 5/8	2.945	331,00	19,00	12,80
69.9	2 3/4	3.212	361,00	20,80	14,00
73	2 7/8	3.488	392,00	22,80	15,30
76.2	3	3.781	425,00	24,70	16,60
79.4	3 1/8	4.075	458,00	26,80	18,00
82.6	3 1/4	4.377	492,00	29,00	19,50
85.7	3 3/8	4.706	529,00	31,30	21,00
88.9	3 1/2	5.018	564,00	33,80	22,70
92.1	3 5/8	5.356	602,00	36,20	24,30
95.3	3 3/4	5.703	641,00	38,70	26,00
98.4	3 7/8	6.050	680,00	41,20	27,70
101.6	4	6.406	720,00	44,00	29,60
104.8	4 1/8	6.735	757,00	47,20	31,70
108	4 1/4	7.109	799,00	49,60	33,30
111.1	4 3/8	7.509	844,00	52,70	35,40
114.3	4 1/2	7.918	890,00	55,70	37,50