


DIN 76 KISA BAKLALI KALİBRE ZİNCİR

d	Tolerans	t	Tolerans	b1 Min.	b2 Maks.	Ağırlık	Çalışma Yüğü	Deneme Yüğü	Kopma Yüğü
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg/100 m)	(kg)	(kN)	(kN)
4,00	± 0,2	16,0	-0,2 - +0,3	4,80	13,6	32,0	200	5,00	8,00
5,00	± 0,2	18,5	-0,2 - +0,4	6,00	17,0	50,0	320	8,00	12,5
6,00	± 0,2	18,5	-0,2 - +0,4	7,20	20,4	80,0	400	10,0	16,0
7,00	± 0,3	22,0	-0,2 - +0,4	8,40	23,8	110	630	16,0	25,0
8,00	± 0,3	24,0	-0,2 - +0,4	9,60	27,2	140	800	20,0	32,0
10,0	± 0,4	28,0	-0,3 - +0,5	12,0	36,0	230	1.250	32,0	50,0
13,0	± 0,5	36,0	-0,3 - +0,6	15,6	47,0	390	2.000	50,0	80,0
16,0	± 0,6	45,0	-0,4 - +0,8	19,2	58,0	580	3.200	80,0	125
18,0	± 0,9	50,0	-0,4 - +0,8	21,6	65,0	740	4.000	100	160
20,0	± 1,0	56,0	-0,5 - +1,0	24,0	72,0	900	5.000	125	200
23,0	± 1,2	64,0	-0,5 - +1,1	27,6	83,0	1.200	6.300	160	250
26,0	± 1,3	73,0	-0,6 - +1,2	31,2	94,0	1.500	8.000	200	320
28,0	± 1,4	78,0	-0,6 - +1,3	33,6	101	1.800	10.000	250	400
30,0	± 1,5	84,0	-0,7 - +1,4	36,0	108	2.000	11.200	280	450
32,0	± 1,6	90,0	-0,7 - +1,5	38,4	115	2.300	12.500	320	500
36,0	± 1,8	101	-0,8 - +1,7	43,2	130	2.900	16.000	400	630
40,0	± 2,0	112	-0,8 - +1,9	48,0	144	3.500	20.000	500	800
42,0	± 2,1	118	-1,0 - +2,0	50,0	151	4.000	22.400	560	900

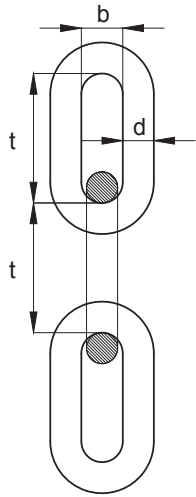

DIN 5685 ZİNCİR

d	Tolerans	t	Tolerans	b1 Min.	Ağırlık
(mm)	(mm)	(mm)	(mm)	(mm)	(kg/100 m)
2,50	± 0,1	14,5	± 0,7	4,60	11,0
3,00	± 0,2	16,0	± 0,8	6,00	17,0
4,00	± 0,2	19,0	± 1,0	7,20	30,0
5,00	± 0,3	21,0	± 1,1	9,10	50,0
6,00	± 0,3	24,0	± 1,2	11,2	73,0
7,00	± 0,4	28,0	± 1,4	12,0	99,0
8,00	± 0,4	32,0	± 1,6	14,0	130
9,00	± 0,5	36,0	± 1,6	17,0	150
10,0	± 0,5	40,0	± 2,0	18,0	200
12,0	± 0,7	44,0	± 2,3	21,0	250
13,0	± 0,7	52,0	± 2,6	23,0	340
14,0	± 0,8	56,0	± 2,6	25,0	390